Jameco Page number 124492

P.C. 124492 AIR CONDITIONER

THE BEST WAY TO COOL A PC!

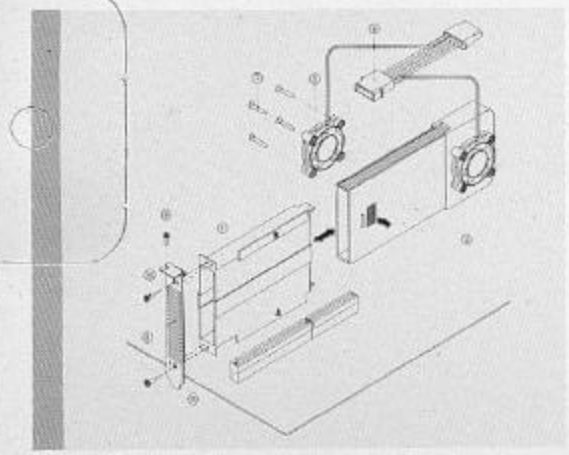

ACCESSORY:

① MAIN AIR DUCT
② SUBSIDIARY AIR DUCT
③ METL SLOT COVER
④ CONNECTOR W/CORD
⑤ FAN
⑥ SLOT HOLES ON M/B
⑦ SCREW 3×15 m/m
⑧ SCREW 3× 5 m/m
⑨ SCREW 6× 6 m/m

HOW TO ASSEMBLY

- PULLING THE MAIN AIR DUCT ① AND SUBSIDIARY AIR DUCT APART ②
- INSTALLING FAN ⑤ WITH SCREW ⑦ ON THE SUBSIDIARY AIR DUCT, WHERE WE HAVE WELL MARKED THE HOLES FOR YOUR ASSEMBLING. (BUT, THIS INSTALLATION WILL BE ONLY AVAILABLE, IF YOUR BUYING THE PC AIR CONDITIONER TO BE WITH 2 FANS.)
- FIXING SLOT COVER ③ ONTO THE MAIN AIR DUCT ① WITH SCREW ⑧.
- INSERTING THE MAIN AIR DUCT ① INTO THE MB SLOT HOLE ⑥. THEN, EXPAND / ADJUST THE LENGTH OF SUBSIDIARY AIR DUCT ② WHATEVER NEEDED.
- FASTENING THE SLOT COVER AND CASE REAR PANEL WITH SCREW ⑨.
- JOINING THE CONNECTOR ④ ONTO THE LARGE-4-PIN OF POWER SUPPLY.

REMARKS: 1, WHILE SEPERATING THE MAIN AND SUBSIDIARY AIR DUCT, PLEASE HARD PRESS THE POSITION OF ← AND PULL BACK. THEN, THE DUCTS WILL BE EASILY GETTING APARTS.

THE PURPOSE OF THIS ACTION IS YOU CAN FREELY REVERSE THE SUBSIDIARY AIR DUCT LETTING FAN BE ON OPPOSITE SIDE.

2. UPON CONNECTING STANDARD M/B, IT WILL BE MUCH IDEAL TO INSERT THE GOLD-FINGER WITH THE "A" MARKING.

IF FOR PCI M/B, IT WILL BE BETTER WITH ANOTHER SIDE OF "B" GOLD FINGERS AND EXTRA SOCKET PARTICULARLY FOR PCI M/B WILL BE ADDITIONALLY REQUESTED.